


Expression Pedals


To program the expression pedal messages, first go into the menu by pressing the center of the home screen and then press the Programming icon.



Then press the EXP1 or EXP2 icon to access the programming screen for either pedal.

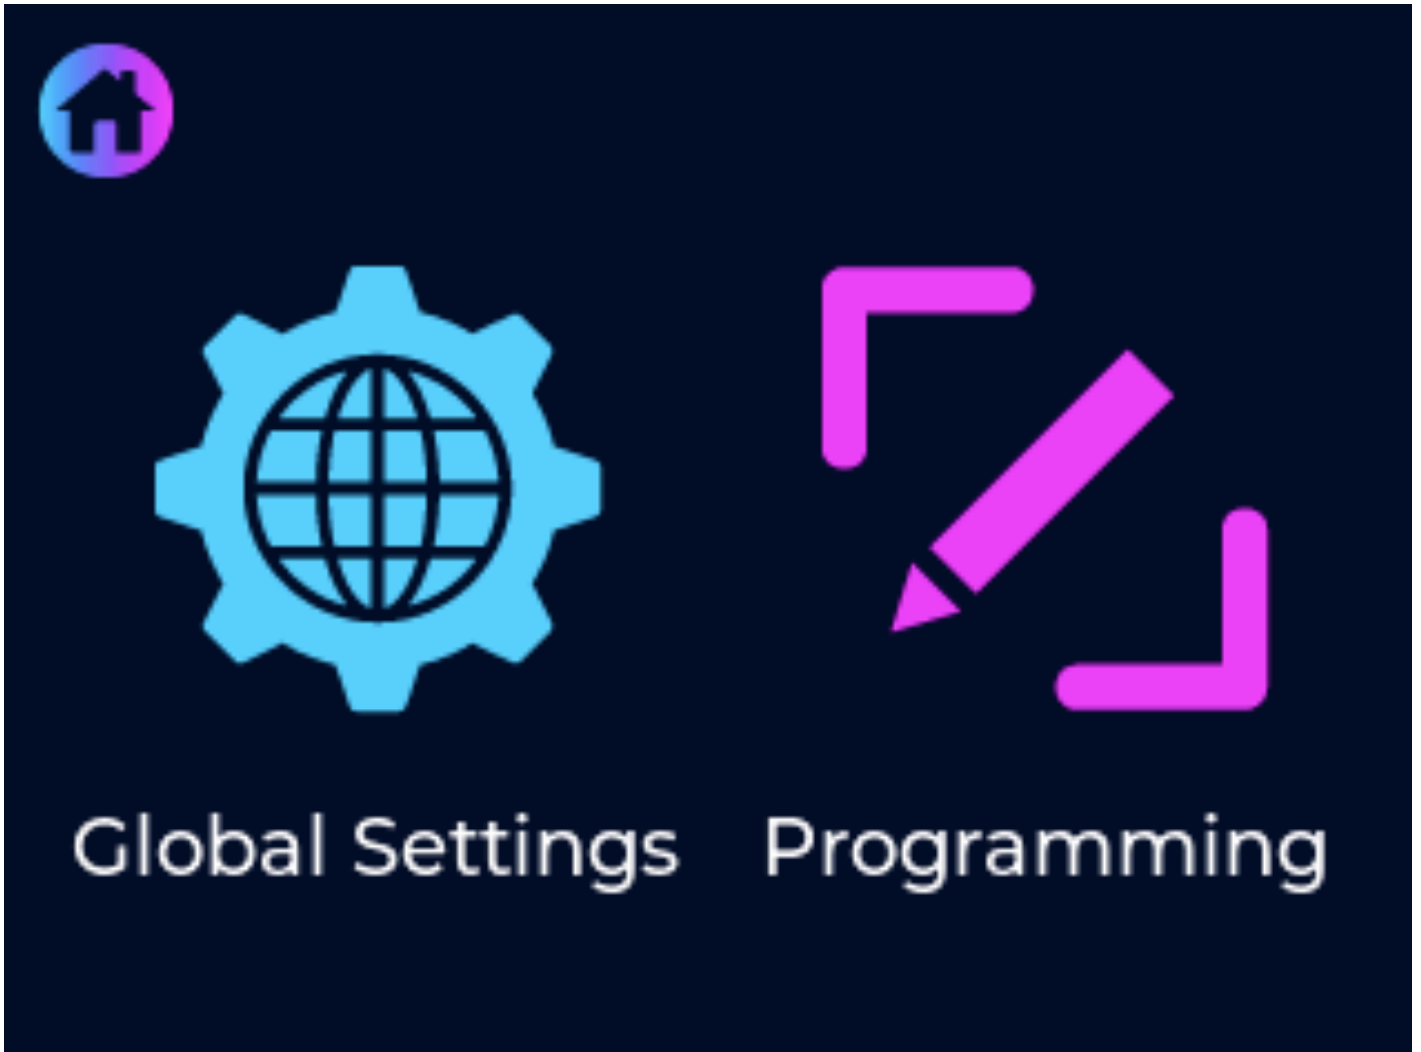

Once inside the programming screen for the expression pedals, you are presented with the options to set the Number, Min Value, and Max Value.

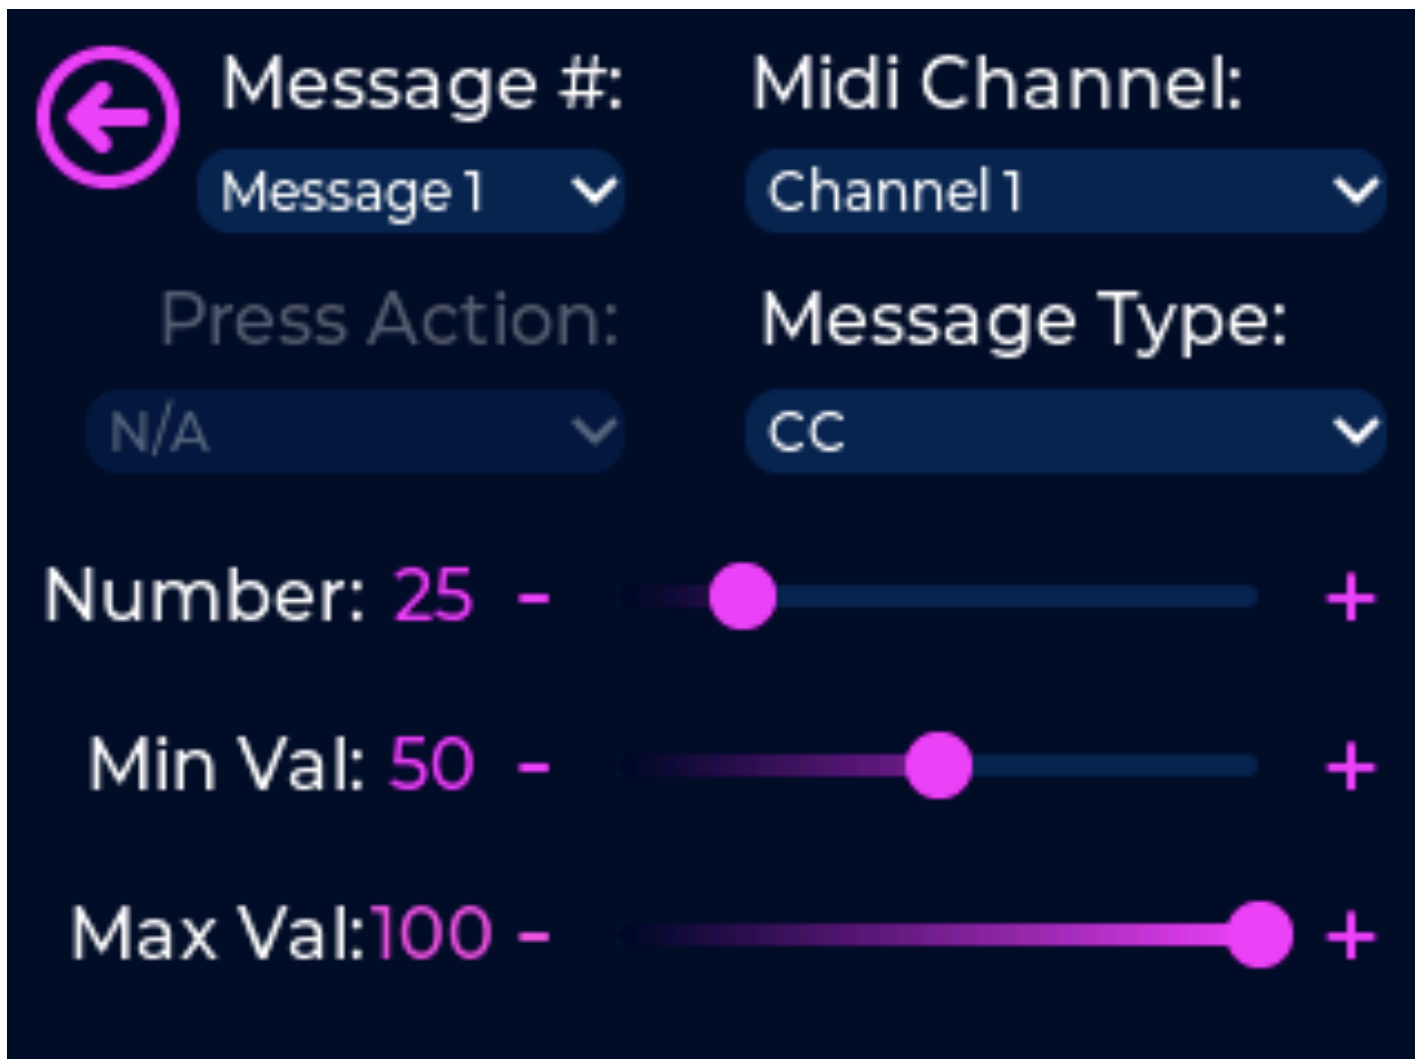

The image shows a MIDI configuration interface for an expression pedal. It features a dark blue background with white and yellow text and controls. At the top left is a yellow circular button with a left-pointing arrow. The interface is organized into two columns of settings. The left column includes 'Message #:' set to 'Message 1', 'Press Action:' set to 'N/A', and a 'Number:' field with the value '25'. The right column includes 'Midi Channel:' set to 'Channel 1', 'Message Type:' set to 'CC', and a 'Min Val:' field with the value '50'. Below these are three horizontal sliders. The first slider is for the 'Number' (25), the second for the 'Min Val' (50), and the third for the 'Max Val' (100). Each slider has a yellow knob and is flanked by a minus sign on the left and a plus sign on the right.

Parameter	Value
Message #:	Message 1
Midi Channel:	Channel 1
Press Action:	N/A
Message Type:	CC
Number:	25
Min Val:	50
Max Val:	100

In the example above setting the Min Value to 50 will send CC#25 with a value of 64 (half of 0-127) when the heel is all the way down on the expression pedal. With the toe all the way down it will send CC#25 with a value of 127.

Each expression pedal has up to 8 individual messages it can send simultaneously which can be saved on a per bank basis. Each message can also have its own unique ranges of Min and Max values.

Revision #2

Created Mon, Jun 10, 2024 7:05 PM by Junior Thomason

Updated Mon, Jun 10, 2024 7:35 PM by Junior Thomason